



MODEL 01 QUICKSTART GUIDE

INTRODUCTION

Thank you for purchasing the Keyboardio Model 01.

We've worked hard to build you the best keyboard we can. We hope that you find it to be worthy of a place on your desk or in your lap for years to come.

As you get used to your new keyboard, we'd welcome your feedback by email to team@keyboard.io.

<3 Jesse + Kaia

CARING FOR YOUR HANDS

We've done our best to make typing on the Keyboardio Model 01 as comfortable an experience as possible. Part of that work is to make the two halves of the Model 01 independently adjustable. As you get used to your new keyboard, you should experiment to find the most comfortable angles and positions for typing. See the section "Adjusting the Model 01" later in this guide.

Your hands are important! You only get one set. Please take good care of them. Take frequent short breaks when typing. If your hands hurt, stop typing and see a doctor. Typing, whether on the Model 01 or any other keyboard, is bad for your health and can cause or worsen debilitating repetitive stress injuries.

CONNECTING THE MODEL 01

First, connect the two halves of the keyboard to each other by plugging one of the included RJ-45 cables into the port on the side of each half. We've included two RJ-45 cables; most people will want to use the short one, but if you want to separate the two halves more than a couple inches use the longer one.

Once that's done, you can connect the Model 01 to your computer with a USB cable. Just plug it in and start typing. You don't need any special drivers. The Model 01's USB port is a "Type C" port. To plug the Model 01 into most computers, use the USB A to Type C cable included with your keyboard.

To plug your Model 01 into a Type C port on your computer, you'll need a Type C to Type C cable. If you want to plug your Model 01 into an iOS or Android device, you'll likely need an adaptor.

We recommend that you disconnect the USB cable from the Model 01 before you disconnect or reconnect the RJ45 cable.

We've tested the Model 01 with macOS, Windows, iOS, Android, as well as a variety of Linux distributions.

TYPING ON THE MODEL 01


Getting started

Learning a new keyboard layout can be an incredibly frustrating endeavour. Don't expect to be back up to your full normal typing speed in the first few days or even the first few weeks.

Like any new skill, typing on the Model 01 takes practice. We recommend starting off with no more than 15 minutes of typing at a time, early in the day. When you get frustrated or start to feel fatigued, switch back to your regular keyboard.

If you're comfortable diving right into work, feel free to go for it, but we'd recommend getting comfortable with your new keyboard before using it for "real-time" activities like online chat and taking notes during a meeting.


One of the best ways to get started is with a 'typing tutor' app. There are numerous free and commercial typing tutor applications. As of early 2017, a few of our free favorites are Keybr.com and 10fastfingers.com (especially its "Top 1000" mode). A paid option that is more of a beautiful, immersive game than typing tutor is [Epistory](http://Epistory.com).

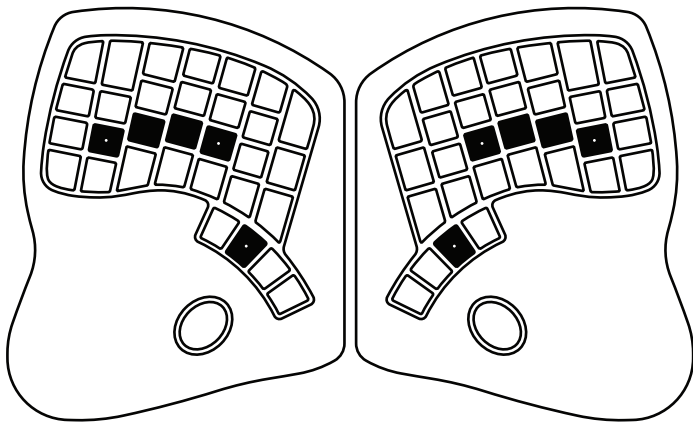

Home position

We designed the Model 01's key layout to reduce the amount of twisting and stretching involved in day to day keyboard use. As a result, the layout is somewhat different than a traditional keyboard. To help you find your way, you'll find "homing dots" on the home positions of your pinkies, index fingers and thumbs.

With the Model 01's default layout, your left pinkie rests on 'A', your left index finger rests on 'F' and your left thumb rests on 'Backspace'. Your right pinkie rests on ';', your right index finger rests on 'J' and your right thumb rests on 'Space'

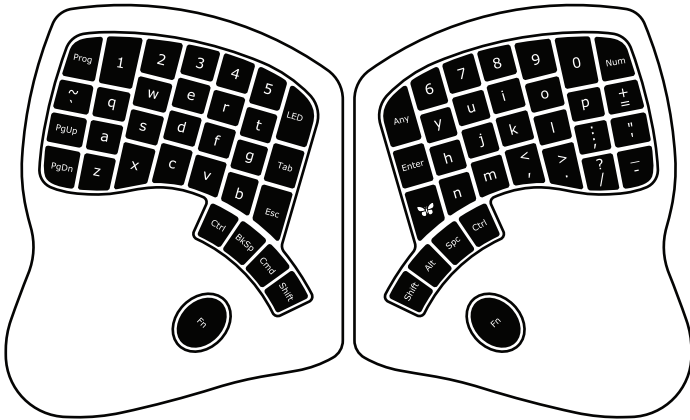

A few notes on key labels

Apple and various PC makers use different labels to represent the same behavior. We've chosen to label the Model 01 in a way that makes sense to us:

Enter is Return on a Mac and Enter on a PC


Cmd is Cmd on a Mac and the Windows key on a PC

Alt is Option on a Mac and Left Alt on a PC

The butterfly is Right Option on a Mac and Right Alt on a PC

Bksp is Delete on a Mac and Backspace on a PC

(**Fn-Bksp** is Forward Delete on a Mac and Delete on a PC)

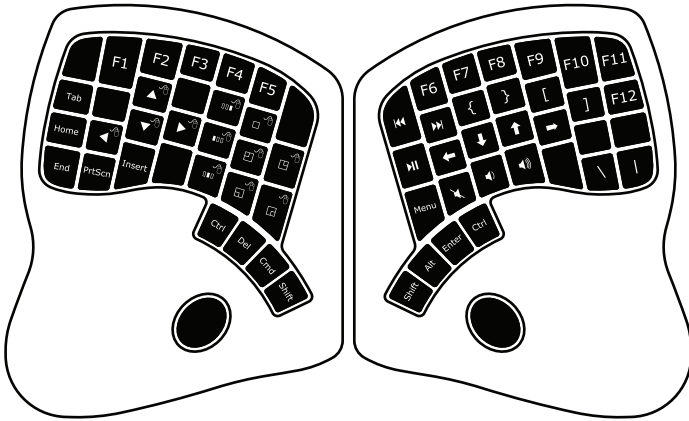


Function keys

One of the things that makes the Model 01 different is the pair of function keys we've placed under your palms. Out of the box, both function keys work the same: If you drop and hold either palm onto the function key, the Model 01 switches into 'function mode'.

H, J, K, L become your arrow keys

U, I, O, P become {, }, [and] respectively

W, A, S, D will move the mouse cursor

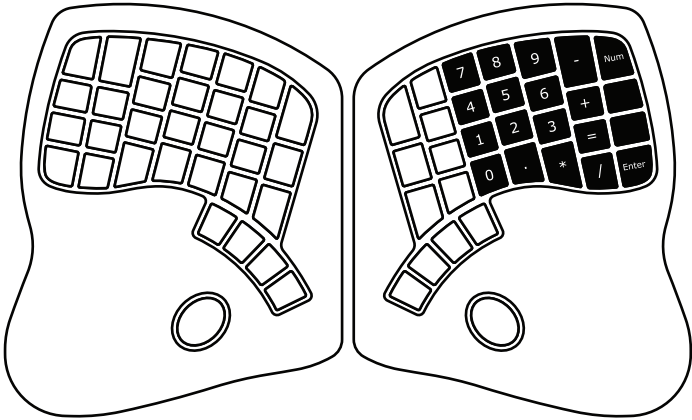

Numpad

The Model 01's default layout includes an embedded numpad. To access it, just tap the “Num” key in the upper right hand corner of the keyboard.

ADJUSTING THE MODEL 01

You can and should adjust the Model 01 to put your hands and arms in a comfortable, neutral position while you're typing. This might include separating the two halves or adjusting the angles of each half using the stands and/or center bars.

The simplest Model 01 configuration is flat on the table, without making use of the stands. You can optionally use the flat center bar to keep the two halves firmly positioned relative to each other (which is also nice if you're using the keyboard on your lap).

Using the stands

The Model 01 comes with a pair of identical angled stands. To attach a stand to the keyboard, disconnect your keyboard from your computer, then gently flip the keyboard over on your desk. To make sure you don't damage the keycaps or wood, we recommend placing something soft under the keyboard when you flip it over. Align the hole in the center of the stand with the brass-colored tripod screw mount in the middle of one side of the keyboard. Use the included tripod screw to loosely attach the stand to the keyboard base. Repeat the same procedure on the other side of the keyboard.

Carefully, flip the keyboard over.

Use one hand to steady the keyboard's wooden enclosure and use the other hand to rotate the stand until you find a comfortable angle.

Once you've found the angle you prefer, lift the keyboard off the table and tighten the tripod screws to lock the keyboard in place. Be careful not to overtighten the screws.

Depending on how your computing setup is arranged, you may prefer to "tent" the Model 01, with the middle higher than the outside edges. You may also prefer to configure the keyboard with the palm rests higher or lower than the keys. You should never adjust your keyboard to make the outside edges higher than the center (this is considered to be pretty bad for your hands and arms).

Using the center bars

Your Model 01 comes with two center bars that you can use to connect both halves of the keyboard. You can use the angled center bar to "tent" the middle of the Model 01 higher than the outside edges.

To use the angled center bar on a desk, you need to use the stands that come with the Model 01. If you're going to put the Model 01 in your lap, you can use the tented center bar without the stands.

To attach a center bar, turn over the keyboard. Then, slide the center bar in the direction of the arrows on the bottom of the keyboard until it clicks into place. To remove a center bar, just reverse that procedure.

Using tripods

The mounting hole on the bottom of each half of the keyboard is a standard 1/4-20 camera tripod mount. If you want to mount the Model 01 in an “interesting” configuration, you can use the tripod mounts with an adjustable camera tripod or custom hardware. The metal tripod mount is molded into the plastic baseplates of the keyboard at manufacturing time. It’s pretty sturdy, but we don’t recommend stressing the mounts more than necessary.

CARING FOR YOUR MODEL 01

Cleaning

We've designed the Model 01 to be easy to care for. The wood is sealed with polyurethane and does not require treatment with oil or wax. If the wooden case, plastic base plate or keycaps need cleaning, we recommend unplugging the keyboard and wiping it down with a cloth or paper towel that has been slightly dampened with water. We recommend against using any chemical cleaning products.

In the dreaded case of crumbs or lint falling into the keyboard, we find canned air to be effective.

If you spill liquid into your Model 01, unplug it immediately and turn the keyboard upside down to allow as much of the liquid as possible to drain. You might also consider unscrewing the wooden enclosure and wiping down the inside of the keyboard with a dry, lint-free cloth.

Always allow electronics to dry before plugging them in.

Transport

Properly taken care of, your Model O1 should be a good companion for many years.

When transporting your Model O1, make sure that the keys are protected from scrapes, impacts and gunk. We've found that a roomy 13" laptop sleeve makes a great soft case.

If you separate the two halves of the keyboard for transportation, disconnect the RJ45 interconnect cable, to reduce the chance of a strong tug hurting the connectors. If you would prefer to keep the two halves of your keyboard connected for transport, use only the flat center bar.

We strongly recommend disconnecting the stands (or anything else) from the tripod mounts on the bottom of the keyboard when packing it for transport.

FIRMWARE & CUSTOMIZATION

Customizing the key layout

Your keyboard ships with Keyboardio's standard "QWERTY" layout. Because the Model 01's firmware is completely customizable, it's possible for you to change the functions of some (or all) of the keys to suit your own usage.

You can download the tools to customize your keyboard's layout at <http://keyboard.io/code>. To find inspiration or help with alternate key layouts, visit the keyboardio community forum at <https://community.keyboard.io>.

Controlling built in LED lighting effects

Your Model 01 ships with a number of built-in LED lighting effects. To cycle through them, tap the "LED" button in the upper right-hand corner of the left side of the keyboard.

Source code

Kaleidoscope, the software that powers your Model 01 is open source, made available under the terms of version 3 of the GNU General Public Licence.

We've designed Kaleidoscope to be easily customizable, with an extensive library of plugins to add nifty features you might find useful or entertaining.

You can read a full copy of the software license, download the source code for Kaleidoscope and learn more about customizing key layouts and LED effects at <http://keyboard.io/code>.

CABLES

USB Cable

The Model 01's USB cable is a USB 2.0 cable with a USB Type C connector on the keyboard side.

Interconnect cable

The cable that connects the two halves of the Model 01 is 8P8C twisted pair cable with RJ45 connectors on either end. If you need to replace the cable that came with your keyboard, any “regular” ethernet cable should work.

GETTING HELP

Keyboardio community

We maintain an online forum for customers at <https://community.keyboard.io>. The forum is a great place to connect with other Model 01 users, to talk about key layouts and firmware modifications, and to get help with your Model 01.

Customer support

If you need help with your Model 01, please don't hesitate to email us at support@keyboard.io. We'll do our best to help you out.

WARRANTY AND REPAIR

Limited one year parts and labor warranty

If you have purchased a new Model 01 from Keyboardio or an authorized distributor, your keyboard is covered by a limited one year parts and labor warranty from your date of purchase.

Opening your keyboard does not void your warranty

Your keyboard comes with a screwdriver. You can use this screwdriver to disassemble your keyboard. Be careful when doing this, as there are sensitive electronics inside and damage to the electronics due to you poking at them will void your warranty. The mere act of unscrewing the parts of your Model 01, however, does not void your warranty.

Replacing or updating your keyboard's firmware does not void your warranty

The Model 01's firmware is open source. That means that you're free to modify it and, if you wish, to share your changes. It's also possible to replace our firmware entirely. We've done a bunch of work to make sure that you can't "brick" (destroy) your keyboard just by flashing alternate firmware. If you think that you might have bricked your keyboard, please drop us a line and we can walk you through recovery procedures.

That said, it is possible for custom firmware to do things that will destroy your keyboard. If misbehaving custom firmware destroys your keyboard, that voids your warranty.

Using the expansion connector does not void your warranty

You have the right to modify your Model 01. That means that we're ok with you changing the keyboard's firmware and with doing unspeakable things to the keyboard's circuit board. To that end, we've provided an "expansion" connector inside the left side of the Model 01. This connector gives you access to all the pins you might find on an Arduino Leonardo. Simply plugging something into this expansion connector does not void your warranty, but as you'll read below, frying the board by doing so does void the warranty.

Misusing the expansion connector may void your warranty

It is entirely possible for you to wire up custom electronics to the expansion connector in a way that will destroy your keyboard. While this voids your warranty, a good writeup of what you were trying to do and where you went wrong is likely to get you a nice discount on a repair or replacement. If you're doing something interesting with the expansion port, consider documenting (and photographing) your work as you go. If things go well, you'll have a tutorial to share. If things go badly, at least you'll have a well-documented sob story.

Accidental or intentional damage will void your warranty

This warranty covers defects in materials and workmanship, but does not cover accidents, abuse or normal wear and tear.

The Model 01's enclosure is made from wood. We've worked hard to design the Model 01's enclosure to be as sturdy as possible. When treated well, it should last you for many years. However, unlike plastic and metal, wood has a habit of shattering when dropped. It also tends to crack when you freeze it or bake it. Really, there are a lot of ways to damage wooden parts. Damage to the wooden enclosure which we determine is not the result of a defect in manufacture or workmanship is not covered by the warranty.

Contact us about repairs

If your keyboard stops working, please contact us at support@keyboard.io and we'll work with you to figure out the best way to get you back up to speed.

If we determine that your keyboard was damaged due to an accident or abuse or is otherwise out of warranty, we may, at our option, choose to repair your keyboard, offer you replacement parts or a replacement keyboard at a discount.